

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|--|-----------|--|
| (51) International Patent Classification ⁷ : H04R 25/00 | A2 | (11) International Publication Number: WO 00/21332 (43) International Publication Date: 13 April 2000 (13.04.00) |
| (21) International Application Number: PCT/DK99/00536 (22) International Filing Date: 7 October 1999 (07.10.99) (30) Priority Data: PA 1998 01274 7 October 1998 (07.10.98) DK (71) Applicant (for all designated States except US): OTICON A/S [DK/DK]; Strandvejen 58, DK-2900 Hellerup (DK). (72) Inventors; and (75) Inventors/Applicants (for US only): DANIELSEN, Finn [DK/DK]; Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK). SKOV, Ulrik [DK/DK]; Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK). | | (81) Designated States: AU, CA, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published Without international search report and to be republished upon receipt of that report. |

(54) Title: FEEDBACK MANAGEMENT FOR HEARING AID

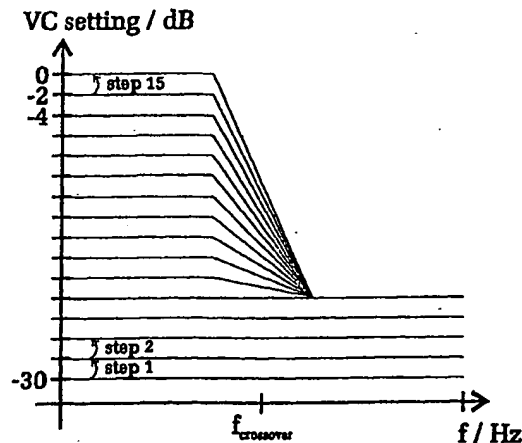

(57) Abstract

The invention relates to a method of managing acoustic feedback in a hearing aid, characterised by using a multi (two or more) channel type of filter hereby splitting the frequency range up in two or more separate parts; determining the maximum allowable gain in at least one frequency range before feedback occurs; monitoring the volume control in such a way, that if the maximum allowable gain before feedback occurs is reached, the gain is manipulated for the offending frequency range. The determination of maximum allowable gain and the monitoring of the volume control is applied for several channels. The invention further relates to hearing aid implementing the method according to the method according to the invention.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | ML | Mali | TR | Turkey |
| BG | Bulgaria | HU | Hungary | MN | Mongolia | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MR | Mauritania | UA | Ukraine |
| BR | Brazil | IL | Israel | MW | Malawi | UG | Uganda |
| BY | Belarus | IS | Iceland | MX | Mexico | US | United States of America |
| CA | Canada | IT | Italy | NE | Niger | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NL | Netherlands | VN | Viet Nam |
| CG | Congo | KE | Kenya | NO | Norway | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NZ | New Zealand | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | PL | Poland | | |
| CM | Cameroon | KR | Republic of Korea | PT | Portugal | | |
| CN | China | KZ | Kazakstan | RO | Romania | | |
| CU | Cuba | LC | Saint Lucia | RU | Russian Federation | | |
| CZ | Czech Republic | LI | Liechtenstein | SD | Sudan | | |
| DE | Germany | LK | Sri Lanka | SE | Sweden | | |
| DK | Denmark | LR | Liberia | SG | Singapore | | |
| EE | Estonia | | | | | | |

TITLE

Feedback management for hearing aid

5

BACKGROUND OF THE INVENTION

The present invention relates to a method of managing acoustic feedback in hearing aids. Feedback is a problem, which occurs in a hearing aid when the acoustic output signal from the hearing aid propagates beside an ear mould or through a vent and consequently enter the hearing aid microphone as an acoustic input. The hereby closed acoustic loop will especially for frequencies above 1-2 kHz often cause the hearing aid to howl, which disables the function of the hearing aid.

During time several attempts have been made to avoid or to reduce the feedback problems of hearing aids. Previously known methods comprise the use of a high frequency cut-off filter to reduce the gain for the feedback management. This method can have the form of an isolated filter to be individually adjusted, but suffer from a drawback in that when the volume control of the hearing aid is turned down and hereby reduces the gain of the feedback frequencies, the filter is still in action reducing the high frequency gain. Another known method comprises a combination of the volume control and a high frequency cut-off filter meaning that when the volume control is turned up and hereby increases the gain of the hearing aid, the filter goes gradually into action and reduces the high frequency gain. The drawbacks of this scheme being that until now this could not be individually adjusted and secondly that the steepness of this filter was a modest 6 dB/octave.

The objective of the present invention is to provide a method for feedback management, which reduces the feedback problems without the previously mentioned drawbacks.

SUMMARY OF THE INVENTION

The objective of the invention is achieved by a method, which is characterised
5 by:

- using a multi (two or more) channel type of filter hereby splitting the frequency range up in two or more separate parts
- determining the maximum allowable gain in at least one frequency range
10 before feedback occurs
- monitoring the volume control in such a way, that if the maximum allowable gain before feedback occurs is reached or exceeded, the gain is manipulated for an offending frequency range.

15 By such a method the above mentioned drawbacks of the previously known methods are remedied and the feedback management may be adjusted individually for the actual user.

In a further embodiment the determining of the maximum gain before feedback
20 occurs and the controlling the volume control is applied for several channels.

By using a multi channel type of filter it is possible by proper selection of the crossover frequencies to use the same type of filter for both feedback and adaption purposes. Using the same filter for both purposes reduces the size of
25 the amplifier and to some extent also the cost of the amplifier.

A 1st or preferably higher order multi channel filter can be used for feedback management and adaptation purposes. This filter has shown to possess adequate properties for the purpose of the method according to the invention.

30

According to the invention the hearing aid comprises a housing containing a microphone, an amplifier in connection with the microphone, a receiver in

connection with the amplifier, where the amplifier comprises a multi channel type of filter, a control system for monitoring the gain in at least one channel, and control means for controlling the volume control in the at least one channel.

5

In a further embodiment the determining of the maximum gain before feedback occurs and the controlling the volume control is applied for several channels.

In a preferred embodiment the multi channel filter is adapted for both
10 feedback management and adaptation purposes.

The invention will be explained more detailed in the following with reference to the drawings.

15

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1-2 are drawings showing the function of a method according to the invention:

20

DESCRIPTION OF THE PREFERRED EMBODIMENT

25 In the FIGS. 1 to 2 the multi channel filter has as an example been chosen to be a two channel type filter along with a suitable crossover frequency.

From FIG. 1 a situation appears where the feedback management has been disabled and the volume control functions in a conventional manner. The
30 volume control comprise in this example 15 steps, each step defining a 2 dB increase or decrease of gain. All frequencies are subjected to the same increase or decrease of gain depending on the setting of the volume control.

From FIG. 2 a situation appears, where the maximum allowable gain in the high frequency channel before feedback occurs has been determined to volume control (VC) setting -12 dB. If the user exceeds this setting of the volume control, the control system takes over and for example keeps the gain in the high frequency channel constant and allows only an increase in gain for the low frequency channel.

The number of channels, step size, the number of steps etc. may in this connection be chosen different from the above example.


CLAIMS

1. A method of managing acoustic feedback in a hearing aid, characterised by
 - 5 • using a multi (two or more) channel type of filter hereby splitting the frequency range up in two or more separate parts
 - determining the maximum allowable gain in at least one frequency range before feedback occurs
 - monitoring the volume control in such a way, that if the maximum
 - 10 allowable gain before feedback occurs is reached or exceeded, the gain is manipulated for an offending frequency range.
2. A method according to claim 1, characterized in that the determination of maximum allowable gain and the monitoring of the volume control is applied
- 15 for several channels.
3. A method according to claim 1 or 2, characterised in that the multi channel filter is of 1. st order or higher.
- 20 4. A method according to claim 1, 2 or 3, characterised in that the multi channel filter is used for feedback management or for adaptation purposes or both.
5. A method according to any of the claims 1-4, characterized in that the gain
- 25 in a manipulated frequency range is kept constant or only increased slightly.
6. A hearing aid comprising a housing containing a microphone, an amplifier in connection with the microphone, a receiver in connection with the amplifier, characterized in that the amplifier comprises a multi channel type of
- 30 filter, a control system for monitoring the gain in at least one channel, and control means for controlling the volume control in the at least one channel.


7. A hearing aid according to claim 6, characterized in that the determining of the maximum gain before feedback occurs and the controlling the volume control is applied for several channels.

5 8. A hearing aid according to claim 6 or 7, characterized in that the multi channel filter is of 1. st order or higher order.

9. A hearing aid according to claim 6,7 or 8, characterized in that the multi channel filter is adapted for both feedback management and adaptation
10 purposes.

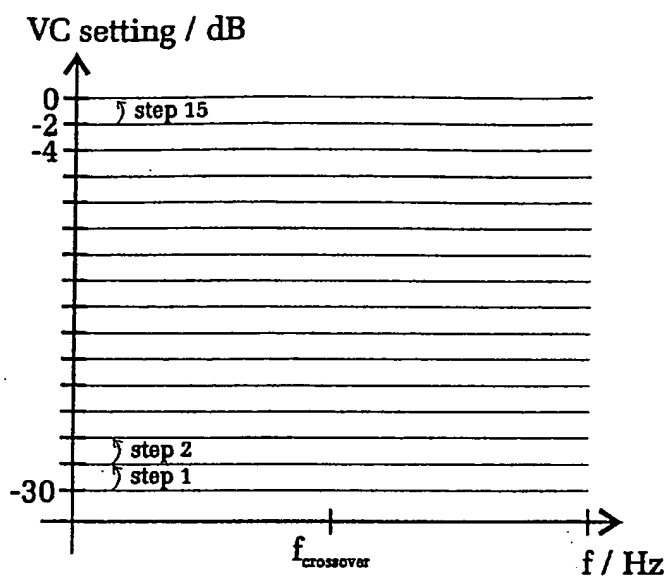

Figur 1

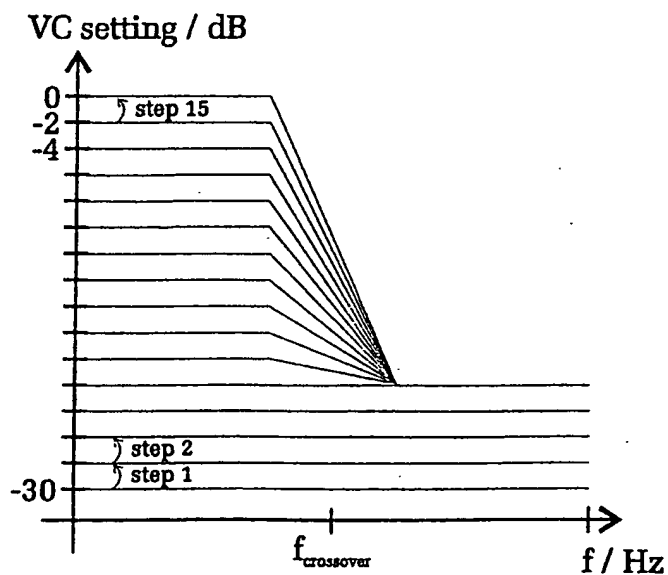

Figur 2

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|---|-----------|--|
| <p>(51) International Patent Classification ⁷ : H04R 25/00</p> | <p>A3</p> | <p>(11) International Publication Number: WO 00/21332 (43) International Publication Date: 13 April 2000 (13.04.00)</p> |
| <p>(21) International Application Number: PCT/DK99/00536 (22) International Filing Date: 7 October 1999 (07.10.99) (30) Priority Data: PA 1998 01274 7 October 1998 (07.10.98) DK (71) Applicant (for all designated States except US): OTICON A/S [DK/DK]; Strandvejen 58, DK-2900 Hellerup (DK). (72) Inventors; and (75) Inventors/Applicants (for US only): DANIELSEN, Finn [DK/DK]; Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK). SKOV, Ulrik [DK/DK]; Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK).</p> | | <p>(81) Designated States: AU, CA, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report. (88) Date of publication of the international search report: 27 July 2000 (27.07.00)</p> |
| <p>(54) Title: FEEDBACK MANAGEMENT FOR HEARING AID</p> <div data-bbox="539 1150 1053 1593"><p>The graph illustrates the VC setting in dB as a function of frequency in Hz. The y-axis is labeled 'VC setting / dB' and ranges from -30 to 0. The x-axis is labeled 'f / Hz' and includes a point 'f_crossover'. There are 15 curves, each representing a different step of the volume control. The top curve is labeled 'step 15' and the bottom curve is labeled 'step 1'. All curves show a similar behavior: they are relatively flat at low frequencies and then drop sharply at the crossover frequency. The drop is more pronounced for higher steps, with 'step 15' dropping from 0 dB to approximately -10 dB and 'step 1' dropping from approximately -25 dB to approximately -30 dB.</p></div> <p>(57) Abstract</p> <p>The invention relates to a method of managing acoustic feedback in a hearing aid, characterised by using a multi (two or more) channel type of filter hereby splitting the frequency range up in two or more separate parts; determining the maximum allowable gain in at least one frequency range before feedback occurs; monitoring the volume control in such a way, that if the maximum allowable gain before feedback occurs is reached, the gain is manipulated for the offending frequency range. The determination of maximum allowable gain and the monitoring of the volume control is applied for several channels. The invention further relates to hearing aid implementing the method according to the method according to the invention.</p> | | |

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | ML | Mali | TR | Turkey |
| BG | Bulgaria | HU | Hungary | MN | Mongolia | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MR | Mauritania | UA | Ukraine |
| BR | Brazil | IL | Israel | MW | Malawi | UG | Uganda |
| BY | Belarus | IS | Iceland | MX | Mexico | US | United States of America |
| CA | Canada | IT | Italy | NE | Niger | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NL | Netherlands | VN | Viet Nam |
| CG | Congo | KE | Kenya | NO | Norway | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NZ | New Zealand | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | PL | Poland | | |
| CM | Cameroon | KR | Republic of Korea | PT | Portugal | | |
| CN | China | KZ | Kazakhstan | RO | Romania | | |
| CU | Cuba | LC | Saint Lucia | RU | Russian Federation | | |
| CZ | Czech Republic | LI | Liechtenstein | SD | Sudan | | |
| DE | Germany | LK | Sri Lanka | SE | Sweden | | |
| DK | Denmark | LR | Liberia | SG | Singapore | | |
| EE | Estonia | | | | | | |

INTERNATIONAL SEARCH REPORT

International Application No
PCT/DK 99/00536

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04R25/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| Y | WO 96 35314 A (TOEPHOLM & WESTERMANN ; TOEPHOLM JAN (DK)) 7 November 1996 (1996-11-07) page 6, line 1 - page 12, line 5; figures | 1-9 |
| Y | WO 94 09604 A (GN DANAVOX AS ; HANSEN ROY SKOVGAARD (DK)) 28 April 1994 (1994-04-28) page 3, line 6 - line 30; figures | 1-9 |
| A | EP 0 342 782 A (CENTRAL INST DEAF) 23 November 1989 (1989-11-23) page 2, line 46 - page 4, line 10; figures | 1,6 |
| A | EP 0 339 819 A (CENTRAL INST DEAF) 2 November 1989 (1989-11-02) column 6, line 37 - column 7, line 54; figure 4 | 1 |

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "B" document member of the same patent family

Date of the actual completion of the international search

29 March 2000

Date of mailing of the international search report

05/04/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Gastaldi, G

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/DK 99/00536

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| WO 9635314 A | 07-11-1996 | AT 171833 T | 15-10-1998 |
| | | AU 698105 B | 22-10-1998 |
| | | AU 2561695 A | 21-11-1996 |
| | | DE 69505155 D | 05-11-1998 |
| | | DE 69505155 T | 15-04-1999 |
| | | EP 0824845 A | 25-02-1998 |
| | | JP 11505077 T | 11-05-1999 |
| | | US 5991417 A | 23-11-1999 |
| WO 9409604 A | 28-04-1994 | DK 128292 A | 21-04-1994 |
| | | AU 5333394 A | 09-05-1994 |
| | | EP 0671114 A | 13-09-1995 |
| | | JP 8502396 T | 12-03-1996 |
| | | US 5619580 A | 08-04-1997 |
| EP 0342782 A | 23-11-1989 | US 5016280 A | 14-05-1991 |
| | | AU 3142189 A | 28-09-1989 |
| | | CA 1326285 A | 18-01-1994 |
| | | DE 68928538 D | 19-02-1998 |
| | | DE 68928538 T | 25-06-1998 |
| | | DK 144589 A | 24-09-1989 |
| | | JP 1298899 A | 01-12-1989 |
| | | JP 2921849 B | 19-07-1999 |
| | | KR 142423 B | 01-07-1998 |
| | | US 5357251 A | 18-10-1994 |
| | | US 5475759 A | 12-12-1995 |
| | | US 5111419 A | 05-05-1992 |
| | | US 5225836 A | 06-07-1993 |
| EP 0339819 A | 02-11-1989 | US 5111419 A | 05-05-1992 |
| | | AU 3245889 A | 12-10-1989 |
| | | CA 1335674 A | 23-05-1995 |
| | | DE 68919741 D | 19-01-1995 |
| | | DE 68919741 T | 20-04-1995 |
| | | DK 170789 A | 12-10-1989 |
| | | JP 1316016 A | 20-12-1989 |
| | | KR 138526 B | 15-06-1998 |
| | | US 5357251 A | 18-10-1994 |
| | | US 5475759 A | 12-12-1995 |
| | | US 5225836 A | 06-07-1993 |